



Patient Monitoring Systems

Patient Monitor
Vital Sign Monitor
Pulse Oximeter

 **bistos**

Patient Monitor



BT-770

- 12.1" color TFT touch screen
- ECG, Resp., SpO₂, NIBP, Temp., CO₂, IBP, Multi-gas, C.O., Masimo SpO₂
- Precise ECG measurement with pacemaker detection
- ST segment and 16 types of arrhythmia analysis
- Double overpressure protection for NIBP
- Intelligent cuff inflation pressure adjustment
- Smart Hook/Stand design, provide multiple placement modes
- Plug & Play Modular IBP& C.O., Modular Printer
- Multiple configuration options: 4-channel IBP, CO₂, invasive C.O., Multi-gas
- Over 5 hours continuous working on battery
- 12-15V wide range DC input, suitable for ambulance
- Capable to connect with central monitoring system
- HL7 export to clinical information systems (option)



Touch screen



Dual Screen Central monitoring station



Ultra Slim design



Smart hook/Stand



IBP, CO, Printer module

Patient Monitor



BT-740

- 8.4" color TFT touch screen
- ECG, Resp., SpO₂, NIBP, Temp., CO₂, Masimo SpO₂
- Ultra-low power consumption
- Fan-less design, super silent
- Accurate SpO₂ performance during motion and low perfusion
- Perfusion index display, pitch tone variation for pulse rate
- USB support for future upgrade and data transfer
- Over 6 hours continuous working on battery



Trend Graphic



Trend Tabular



BT-750

- 10.4" color TFT LCD
- ECG, Resp., SpO₂, NIBP, Temp., CO₂
- Light weight for portable use (3kg)
- 72 hours of tabular and graphic trend data
- Multi Language Support
- Rolling stand and wall mount
- Central Monitoring System

Vital Sign Monitor




BT-720

- 4.3" color touch screen
- SpO2, Pulse, NIBP, Masimo SpO2
- Short/long trend graphic / trend table display
- Audio & visual alarm, adjustable alarm limit
- Automatic brightness adjustment
- Accurate SpO2 performance during motion and low perfusion
- Perfusion Index data / bar graph display
- Pitch tone variation for pulse rate
- Internal memory for data storage
- SD card for easy software upgradation
- Over 8 hours continuous working on rechargeable lithium-ion battery
- Specialized PC software for data review and analysis
- Option for Masimo SpO2, NIBP
- HL7 export to clinical information systems



Portable design

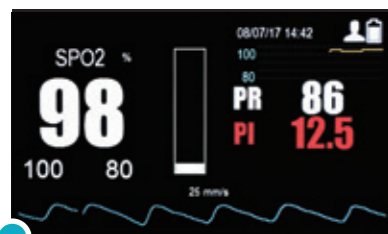


SpO2




SpO2+NIBP



Trend Graphic

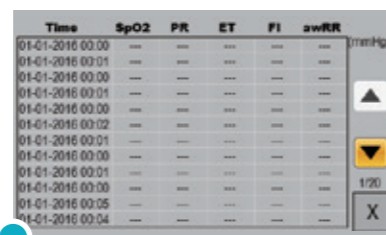

Trend Tabular

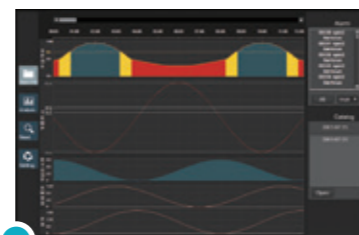

PC Viewer Software

Pulse Oximeter




BT-710

- 4.3" color touch screen
- Handheld style
- SpO2, Pulse
- Accurate SpO2 performance during motion and low perfusion
- Specialized PC software for data review and analysis
- Over 8 hours continuous working on rechargeable lithium-ion battery
- 5V DC input with convenient Micro-USB charger
- Battery can be charged by external USB battery
- Suitable for adult, pediatric and neonate



Handheld size

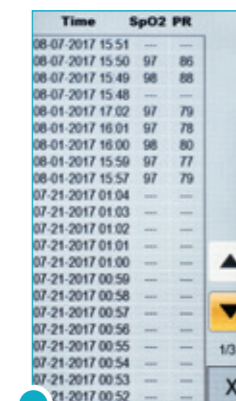

Trend Tabular



BT-700

- 3.2" color LCD
- Desktop Pulse Oximeter
- SpO2, Pulse
- Trend Graphic, Trend Tabular display
- Internal data saving
- Firmware upgrade by USB interface
- Apply nurse call state

BISTOS Patient Monitor Technical Specification

* Option ** Option (BT-720)

Model Category		BT-770 Patient Monitor	BT-750 Patient Monitor	
Display		12.1" Color Touch LCD	10.4" Color LCD	
ECG	Lead Type	5 lead	3/5 lead	
	Gain Selection	x0.125, x0.25, x0.5, x1, x2, auto	5, 10, 20mm/mV	
	Sweep Speed (mm/s)	12.5, 25, 50	12.5, 25, 50	
	Bandwidth : Diagnostic Mode	0.05-130 Hz		
	Monitoring Mode	0.5-40 Hz		
	Surgery Mode	1-25 Hz		
	Strong Mode	5-20 Hz		
Hert Rate Range (bpm)		Adult : 15-300 Pediatric/Neonate: 15-350	Adult : 20 - 250 Adult : 20 - 250	
Respiration	Method	Trans-thoracic impedance	Trans-thoracic impedance	
	Measurement Range	0-120 rpm	0-150 rpm	
	Sweep Speed (mm/s)	6.25, 12.5, 25	6.25, 12.5, 25	
SpO ₂	Measurement Range	0-100 %	0-100 %	
	Accuracy (70-100%)	Adult/Pediatric	±2%	±2%
		Neonate	±3%	±3%
	Accuracy (0-69%)	unspecified	unspecified	
	Perfusion Index	0.05-20%	0.05-20%	
	Pulse Rate Range (bpm)	25-250	20-250	
NIBP**	Method	Automatic Oscillometric	Automatic Oscillometric	
	Operation Mode	Manual / Auto / STAT	Manual / Auto / STAT	
	Parameter	Systolic, Diastolic, Mean	Systolic, Diastolic, Mean	
	Systolic Range (mmHg)	Adult	40-270	50-255
		Pediatric	40-200	50-255
		Neonate	40-130	30-130
	Diastolic Range (mmHg)	Adult	10-210	30-220
		Pediatric	10-160	30-220
		Neonate	10-90	20-100
	Mean Range (mmHg)	Adult	20-230	40-235
Pediatric		20-175	40-235	
Neonate		20-100	25-120	
Temperature	Range	0-50°C (41 to 122 °F)	10-45°C (50 to 113 °F)	
	Parameter	T1, T2 and TD	T1, T2	
IBP *	Channel	2 Channel / 4 Channel	2 Channel	
	Range (mmHg)	-50 to 400	-50 to 300	
Printer *	Type	Thermal dot array	Thermal dot array	
	Print Speed (mm/s)	12.5, 25, 50	50	
	Paper size (mm)	50	50.8	
CO ₂ *	Sidestream	Masimo ISA / Bistos	Respirationics	
	Mainstream	Masimo IRMA/ Bistos		
Multi-gas/O ₂ *		Masimo ISA		
SpO ₂ -Masimo *		Masimo SpO ₂		
C.O. *	Method	Thermodilution		
	Range	0.2 - 20 L/min		
Battery	Type (capacity)	Li-ion (4400mAh)	Li-ion (2200mAh)	
	Run Time	5 hour	4 hour	
	Charging Time	4 hour	4 hour	
PC Software Interface		RJ45, USB, Nursing call	RJ45*, RS232C	
Warranty		2 year	2 year	

BT-740 Patient Monitor	BT-720 Vital Sign Monitor	BT-710 Handheld Pulse Oximeter	BT-700 Pulse Oximeter
8.4" Color Touch LCD	4.3" Touch LCD	4.3" Touch LCD	3.2" Color LCD
5 lead			
x0.25, x0.5, x1, x2, x4 auto			
12.5, 25, 50			
0.05-130Hz			
0.5-40Hz			
1-25Hz			
5-20Hz			
Adult : 15-300 Pediatric/Neonate: 15-350			
Trans-thoracic impedance			
0-120 rpm			
6.25, 12.5, 25			
0-100 %	0-100 %	0-100 %	0-100 %
±2%	±2%	±2%	±2%
±3%	±3%	±3%	±3%
unspecified	unspecified	unspecified	unspecified
0.05-20%	0.05-20%	0.05-20%	
25-250	25-250	25-250	30-250
Automatic Oscillometric	Automatic Oscillometric		
Manual / Auto / STAT	Manual / Auto / STAT		
Systolic, Diastolic, Mean	Systolic, Diastolic, Mean		
40-270	40-270		
40-200	40-200		
40-130	40-130		
10-210	10-210		
10-160	10-160		
10-90	10-90		
20-230	20-230		
20-175	20-175		
20-100	20-100		
0-50°C (41 to 122 °F)			
T1, T2 and TD			
2 Channel / 4 Channel			
-50 to 400			
Thermal dot array			
12.5, 25, 50			
50			
Masimo ISA / Bistos			
Masimo IRMA/ Bistos			
Masimo ISA			
Masimo SpO ₂	Masimo SpO ₂		
Thermodilution			
0.2 - 20 L/min			
Li-ion (4400mAh)	Li-ion (4400mAh)	Li-ion (4400mAh)	Li-ion (2600mAh)
6 hour	8 hour	8 hour	3 hour
4 hour	8 hour	8 hour	8 hour
RJ45, USB, Nursing call	RJ45, SD card slot	SD card slot	RS232C, Nursing call
2 year	2 year	2 year	2 year



BIO SIGNAL TOTAL SOLUTION

Bistos Co., Ltd. (Headquarter)

7th Fl., A Bldg., Woolim Lions Valley 5-cha, 302,
Galmachi-ro, Jungwon-gu, Seongnam-si,
Gyeonggi-do, Korea

Tel. +82 (31) 750 0340

Fax. +82 (31) 750 0344

bistos@bistos.co.kr

www.bistos.co.kr

Bistos America Inc. (US Branch)

11417 W Bernardo Ct Ste D, San Diego, CA 92117, USA

Tel. +1-868-433-6689

Fax. +1-888-391-5153